

Pool Cover Installation

To install your solar pool cover:

- 1) Lay the cover **bubble side to the water.**
- 2) Flatten out all air bubbles so that the cover sits relatively flat on the water.
- 3) Using your pool as a template, take a pair of ordinary household scissors (the sharper the better!) and with someone holding the cover in position, cut the edge of the cover so that it sits flat on the water with 50 -75 mm rising up the side of the pool (but not necessary for the top edge of the pool).

If required, you can:

A) Cut the cover back to waterline, however, wait 2-3 weeks after initial cut for it to settle down.

B) Cut two vertical slits in the cover upturn, either side of your skimmer box, fold the flap you have created into the skimmer box, therefore allowing you to hose debris off the top of the cover into the skimmer box.

Your Daisy cover is delivered with an ample margin for trim. In some cases the excess is sufficient for secondary use and left for you to use as you see fit.

Because our covers are made of polyethylene they are category 4 LDPE recyclable.

To ensure receipt of the benefit of this warranty, complete this section upon purchase and retain with purchase receipt for production upon warranty claim.

Purchased from:

Please note: Solar pool covers are not safety covers. They are not designed to support people. Do not swim under the Cover.

This warranty covers the purchaser for defective material or workmanship on a pro rata basis as set out below. The manufacturer will repair or replace the product upon inspection or photo image. Daisy reserves the right to refuse repeat claims of the same damage.

The warranty may be void if:

- 1 The purchaser fails to comply with the manufactures installation instructions.
- 2 Exposes the cover rolled or folded to the sun.
- 3 Subjects the cover to conditions, which result in tears, cuts or damage.
- 4 Stores the cover at a temperature above 45 degrees Celsius.
- 5 Stores the cover in other than complete shade.
- 6 Allows the chlorine levels to be maintained at a higher than normal level.

This is a Pro Rata month by month warranty. This means that Daisy Pool Covers will pay for the amount of time that you do not achieve from your Pool Cover (up to the maximum warranty period). It also means that you must pay for the period of time during which you have used the product.

Note - This Warranty is not redeemable for cash, only as a discount on a replacement cover purchase.

Product	Pro-Rata Warranty cover
S3 Series 3 (200um) UltraDome TM	3 Years
S4 Series 4 (300um) UltraDome TM	4 Years
S5 Series 5 (400um) UltraDome TM	5 Years
S8 Series 8 (500um) UltraDome TM	8 Years
ThermoTech 3mm Foam	8 Years

Daisy Saves

Congratulations. Here's how to look after your Daisy Pool Cover and Roller.

Care & Maintenance

Cover Installation



Daisy is Australia's largest supplier of pool covers and rollers.

Call: 1300 551 811 Fax: 1300 885 242



daisy
pool covers & rollers
www.daisypoolcovers.com.au

daisy
pool covers & rollers

WITHOUT PROPER CARE

ANY pool cover can be ruined in less than **HALF** of it's predicted life span. 95% of all warranty claims are not caused by product failure, but by owner abuse, caused by:

A) Leaving a cover rolled up in the direct sunlight while off the pool.

OR

B) Having excess chlorine in the pool (either a little too high over a prolonged period or a lot too high over a very short period)

Either of these may VOID YOUR WARRANTY

To ensure the effective life of your pool cover please:

1 - Ensure that your chlorine levels never exceed 3ppm.

(Chlorine is a corrosive agent and actually wears the cover) and please do not assume that your salt-water chlorinator can control chlorine levels in your water.

TEST YOUR WATER REGULARLY.

2 - Ensure that you take the cover off (and leave it off for 48 hours) when super chlorinating.

3 - Never leave the cover folded or rolled up in the sun. It must be in full shade. (Not under shade cloth)

This will cause the cover to be damaged in strips across the cover and will cause delamination, also the sun and heat will cause corrosive wear.

4 - Do not cover the blanket with a tarpaulin or anything other than the recommended cover type.

This material will reflect the sun's rays while many others will absorb them.


5 - When storing the cover ensure that it has been washed on both sides with fresh water before storage.

This does not apply if you are replacing the cover within 24 hours. This prevents the chlorine residue from burning the cover.

6 - If you have a roller ensure that you place the white overcover (supplied with the roller) over the cover every time you roll up the cover, even if the swim is only for 10 minutes, as this is enough time to destroy the cover.

Overheating on the roller will cause delamination in strips across the cover and in extreme cases can cause the material to become molten and weld itself to itself


Defective material or workmanship on a pro-rata basis as set out on the back page. The manufacturer will repair or replace the product upon inspection at their premises.

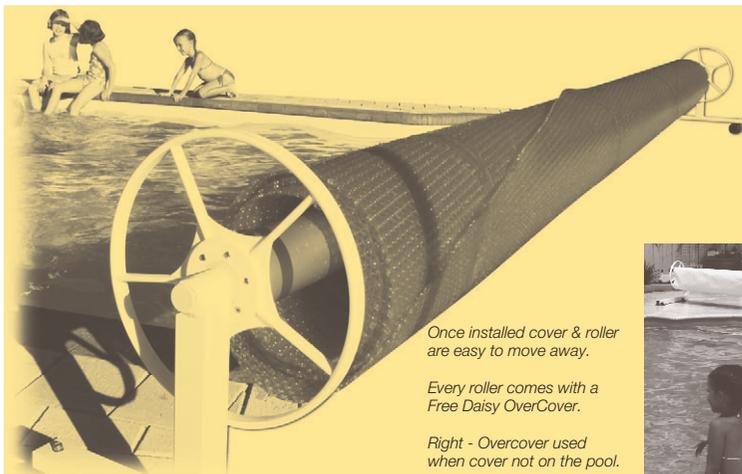

Once installed cover & roller are easy to move away.

Every roller comes with a Free Daisy OverCover.

Right - Overcover used when cover not on the pool.

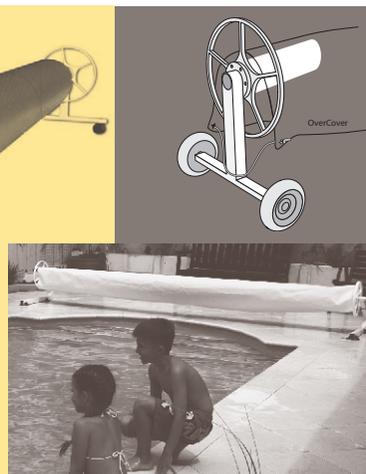

Tips to Save your Daisy

- 1) Whenever the cover is rolled up on the roller, ensure that the overcover is in place.
- 2) To prevent damage to your cover, do not drag the cover over abrasive pool decking or any sharp surfaces.
- 3) Excessive temperatures can damage your cover. Ensure that your pool does not reach excessive temperatures.
- 4) Most dirt and debris can be hosed or swept into your skimmer box. If you have a large amount of debris on top of your cover, a broom or brush can be used to sweep it into a pile for removal. Water and a soft brush are all that is required to remove heavier grime.
- 5) Before storage your cover should be thoroughly hosed both sides to remove any of the pool chemicals. When storing your solar pool cover, it can not be subjected to the sun. Store in a completely covered environment.
- 6) When rolling up the cover onto the roller, ensure that it rolls up evenly. Always use your overcover whenever your cover is on the roller.
- 7) Test your water regularly to maintain correct chlorine levels. Your cover will deteriorate quicker when you

- have excessive chlorine. When super chlorinating, leave your cover off the pool for 48 hours. This allows your chlorine level to come back to normal.
- 8) Roll your cover over the top of your roller when using.
- 9) Fold in any flaps or step areas on the cover before rolling it up. This will ensure that you don't put excessive force on the cover and allows it to move easily.
- 10) When putting the cover back onto the pool, roll the cover out slightly, fold one corner over onto itself (to create a bow effect), pick up the other corner and walk slowly down the side of your pool. (see cover image)
- 11) Do not sit or step on your roller. If the tube gets bent, it can not be repaired.
- 12) Monitor your chemical levels to maintain correct balance.
- 13) When using your roller, ensure that the brakes on the castors are locked.
- 14) If a storm is imminent, roll up the cover and store it safely.

